


Complex Unit Circle

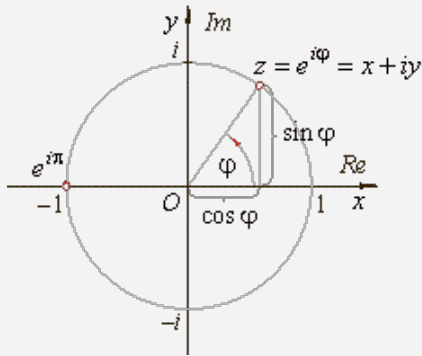

DFT Table

Table C.2 Fourier Transform Pairs	Table C.3 Fourier Transform Theorems																																																						
<table border="1"> <thead> <tr> <th>$x(t)$</th><th>$X(f)$</th></tr> </thead> <tbody> <tr><td>1. $\delta(t)$</td><td>$\int_{-\infty}^{\infty} e^{-j2\pi ft} dt$</td></tr> <tr><td>2. $\delta(t-T)$</td><td>$e^{-j2\pi fT}$</td></tr> <tr><td>3. $\sin(\omega t)$</td><td>$\frac{1}{2j} [\delta(f - \frac{\omega}{2\pi}) - \delta(f + \frac{\omega}{2\pi})]$</td></tr> <tr><td>4. $e^{j\omega t}$</td><td>$\delta(f - \frac{\omega}{2\pi})$</td></tr> <tr><td>5. $e^{-j\omega t}$</td><td>$\delta(f + \frac{\omega}{2\pi})$</td></tr> <tr><td>6. $e^{j\omega t}$</td><td>$\delta(f - \frac{\omega}{2\pi})$</td></tr> <tr><td>7. $e^{-j\omega t}$</td><td>$\delta(f + \frac{\omega}{2\pi})$</td></tr> <tr><td>8. 1</td><td>$\delta(f)$</td></tr> <tr><td>9. $\delta(t)$</td><td>1</td></tr> <tr><td>10. $\cos(\omega t)$</td><td>$\frac{1}{2} [\delta(f - \frac{\omega}{2\pi}) + \delta(f + \frac{\omega}{2\pi})]$</td></tr> <tr><td>11. $\sin(\omega t)$</td><td>$\frac{1}{2j} [\delta(f - \frac{\omega}{2\pi}) - \delta(f + \frac{\omega}{2\pi})]$</td></tr> <tr><td>12. $\cos(\omega_1 t) \cos(\omega_2 t)$</td><td>$\frac{1}{4} [\delta(f - \frac{\omega_1 + \omega_2}{2\pi}) + \delta(f - \frac{\omega_1 - \omega_2}{2\pi}) + \delta(f + \frac{\omega_1 - \omega_2}{2\pi}) + \delta(f + \frac{\omega_1 + \omega_2}{2\pi})]$</td></tr> <tr><td>13. $\sum_{n=-\infty}^{\infty} \delta(t - nT)$</td><td>$\frac{1}{T} \sum_{k=-\infty}^{\infty} \delta(f - \frac{k}{T})$</td></tr> </tbody> </table>	$x(t)$	$X(f)$	1. $\delta(t)$	$\int_{-\infty}^{\infty} e^{-j2\pi ft} dt$	2. $\delta(t-T)$	$e^{-j2\pi fT}$	3. $\sin(\omega t)$	$\frac{1}{2j} [\delta(f - \frac{\omega}{2\pi}) - \delta(f + \frac{\omega}{2\pi})]$	4. $e^{j\omega t}$	$\delta(f - \frac{\omega}{2\pi})$	5. $e^{-j\omega t}$	$\delta(f + \frac{\omega}{2\pi})$	6. $e^{j\omega t}$	$\delta(f - \frac{\omega}{2\pi})$	7. $e^{-j\omega t}$	$\delta(f + \frac{\omega}{2\pi})$	8. 1	$\delta(f)$	9. $\delta(t)$	1	10. $\cos(\omega t)$	$\frac{1}{2} [\delta(f - \frac{\omega}{2\pi}) + \delta(f + \frac{\omega}{2\pi})]$	11. $\sin(\omega t)$	$\frac{1}{2j} [\delta(f - \frac{\omega}{2\pi}) - \delta(f + \frac{\omega}{2\pi})]$	12. $\cos(\omega_1 t) \cos(\omega_2 t)$	$\frac{1}{4} [\delta(f - \frac{\omega_1 + \omega_2}{2\pi}) + \delta(f - \frac{\omega_1 - \omega_2}{2\pi}) + \delta(f + \frac{\omega_1 - \omega_2}{2\pi}) + \delta(f + \frac{\omega_1 + \omega_2}{2\pi})]$	13. $\sum_{n=-\infty}^{\infty} \delta(t - nT)$	$\frac{1}{T} \sum_{k=-\infty}^{\infty} \delta(f - \frac{k}{T})$	<table border="1"> <thead> <tr> <th>Name</th><th>Transform Pair</th></tr> </thead> <tbody> <tr><td>1. Linearity</td><td>$aX(t) + bY(t) \rightarrow aX(f) + bY(f)$</td></tr> <tr><td>2. Scale change</td><td>$X(at) \rightarrow \frac{1}{ a } X(f/a)$</td></tr> <tr><td>3. Time reversal</td><td>$X(-t) \rightarrow X^*(f)$</td></tr> <tr><td>4. Complex conjugation</td><td>$X^*(t) \rightarrow X(-f)$</td></tr> <tr><td>5. Duality</td><td>$X(f) \rightarrow x(-f)$</td></tr> <tr><td>6. Time shift</td><td>$X(t - t_0) \rightarrow e^{-j2\pi f t_0} X(f)$</td></tr> <tr><td>7. Frequency translation</td><td>$X(t)e^{j2\pi f_0 t} \rightarrow X(f - f_0)$</td></tr> <tr><td>8. Modulation</td><td>$X(t) \cos(2\pi f_0 t) \rightarrow \frac{1}{2} [X(f - f_0) + X(f + f_0)]$</td></tr> <tr><td>9. Time differentiation</td><td>$\frac{dX(t)}{dt} \rightarrow (j2\pi f) X(f)$</td></tr> <tr><td>10. Time integration</td><td>$\int_{-\infty}^{\infty} X(t) dt \rightarrow \delta(f)$</td></tr> <tr><td>11. Convolution</td><td>$X(t) * Y(t) \rightarrow X(f) Y(f)$</td></tr> <tr><td>12. Multiplication</td><td>$X(t) Y(t) \rightarrow X(f) * Y(f)$</td></tr> </tbody> </table>	Name	Transform Pair	1. Linearity	$aX(t) + bY(t) \rightarrow aX(f) + bY(f)$	2. Scale change	$X(at) \rightarrow \frac{1}{ a } X(f/a)$	3. Time reversal	$X(-t) \rightarrow X^*(f)$	4. Complex conjugation	$X^*(t) \rightarrow X(-f)$	5. Duality	$X(f) \rightarrow x(-f)$	6. Time shift	$X(t - t_0) \rightarrow e^{-j2\pi f t_0} X(f)$	7. Frequency translation	$X(t)e^{j2\pi f_0 t} \rightarrow X(f - f_0)$	8. Modulation	$X(t) \cos(2\pi f_0 t) \rightarrow \frac{1}{2} [X(f - f_0) + X(f + f_0)]$	9. Time differentiation	$\frac{dX(t)}{dt} \rightarrow (j2\pi f) X(f)$	10. Time integration	$\int_{-\infty}^{\infty} X(t) dt \rightarrow \delta(f)$	11. Convolution	$X(t) * Y(t) \rightarrow X(f) Y(f)$	12. Multiplication	$X(t) Y(t) \rightarrow X(f) * Y(f)$
$x(t)$	$X(f)$																																																						
1. $\delta(t)$	$\int_{-\infty}^{\infty} e^{-j2\pi ft} dt$																																																						
2. $\delta(t-T)$	$e^{-j2\pi fT}$																																																						
3. $\sin(\omega t)$	$\frac{1}{2j} [\delta(f - \frac{\omega}{2\pi}) - \delta(f + \frac{\omega}{2\pi})]$																																																						
4. $e^{j\omega t}$	$\delta(f - \frac{\omega}{2\pi})$																																																						
5. $e^{-j\omega t}$	$\delta(f + \frac{\omega}{2\pi})$																																																						
6. $e^{j\omega t}$	$\delta(f - \frac{\omega}{2\pi})$																																																						
7. $e^{-j\omega t}$	$\delta(f + \frac{\omega}{2\pi})$																																																						
8. 1	$\delta(f)$																																																						
9. $\delta(t)$	1																																																						
10. $\cos(\omega t)$	$\frac{1}{2} [\delta(f - \frac{\omega}{2\pi}) + \delta(f + \frac{\omega}{2\pi})]$																																																						
11. $\sin(\omega t)$	$\frac{1}{2j} [\delta(f - \frac{\omega}{2\pi}) - \delta(f + \frac{\omega}{2\pi})]$																																																						
12. $\cos(\omega_1 t) \cos(\omega_2 t)$	$\frac{1}{4} [\delta(f - \frac{\omega_1 + \omega_2}{2\pi}) + \delta(f - \frac{\omega_1 - \omega_2}{2\pi}) + \delta(f + \frac{\omega_1 - \omega_2}{2\pi}) + \delta(f + \frac{\omega_1 + \omega_2}{2\pi})]$																																																						
13. $\sum_{n=-\infty}^{\infty} \delta(t - nT)$	$\frac{1}{T} \sum_{k=-\infty}^{\infty} \delta(f - \frac{k}{T})$																																																						
Name	Transform Pair																																																						
1. Linearity	$aX(t) + bY(t) \rightarrow aX(f) + bY(f)$																																																						
2. Scale change	$X(at) \rightarrow \frac{1}{ a } X(f/a)$																																																						
3. Time reversal	$X(-t) \rightarrow X^*(f)$																																																						
4. Complex conjugation	$X^*(t) \rightarrow X(-f)$																																																						
5. Duality	$X(f) \rightarrow x(-f)$																																																						
6. Time shift	$X(t - t_0) \rightarrow e^{-j2\pi f t_0} X(f)$																																																						
7. Frequency translation	$X(t)e^{j2\pi f_0 t} \rightarrow X(f - f_0)$																																																						
8. Modulation	$X(t) \cos(2\pi f_0 t) \rightarrow \frac{1}{2} [X(f - f_0) + X(f + f_0)]$																																																						
9. Time differentiation	$\frac{dX(t)}{dt} \rightarrow (j2\pi f) X(f)$																																																						
10. Time integration	$\int_{-\infty}^{\infty} X(t) dt \rightarrow \delta(f)$																																																						
11. Convolution	$X(t) * Y(t) \rightarrow X(f) Y(f)$																																																						
12. Multiplication	$X(t) Y(t) \rightarrow X(f) * Y(f)$																																																						

Discrete Fourier Transform

$$X_k \stackrel{\text{def}}{=} \sum_{n=0}^{N-1} x_n \cdot e^{-2\pi i k n / N}, \quad k \in \mathbb{Z}$$

Butterworth Lowpass Filter

$$H(u, v) = \frac{1}{1 + \left(\frac{D(u, v)}{D_0}\right)^{2n}}$$

D_0 is cutoff freq and $D(u, v)$ is distribution of (u, v) from centered origin. n is order

Sinc Definition

$$\text{sinc}(x) = \begin{cases} 1 & \text{if } x = 0 \\ \frac{\sin(x)}{x} & \text{otherwise} \end{cases}$$

Wrap Around Error

Solved by zero padding

If $f(x)$ and $h(x)$ are A and B samples respectively, pad $f(x)$ and $h(x)$ with zeros so both have length $P \geq A+B-1$

If not zero, creates discontinuity called "frequency leakage", equivalent to convolving with $\text{sinc}()$ function

Reduced by multiplying with function that tapers smoothly to zero (windowing or apodizing)

Steps for Filtering

- 1 + 2. Given $f(x, y)$ is $M \times N$, zero pad to $2M \times 2N$ ($P \times Q$)
3. Multiply by $(-1)^{x+y}$ to center
4. Take DFT of $f(x, y)$ to get $F(u, v)$
5. Generate symmetric filter $H(u, v)$ of size $P \times Q$
6. Get processed image $gp(x, y) = \text{real}\{F^{-1}\{G(u, v)\}} * (-1)^{x+y}$

Fourier Spectrum and Phase Angle

$$P(u, v) = |F(u, v)|^2$$

$$|F(u, v)| = \sqrt{|F(u, v)|^2} = \sqrt{|F(u, v)|^2}$$

$$\phi(u, v) = \tan^{-1} \left[\frac{F_{\text{Im}}(u, v)}{F_{\text{Re}}(u, v)} \right]$$

Conjugate Symetry

- $F^*(u, v) = F(-u, -v)$ (Conjugate Symmetry)
- $F^*(-u, -v) = -F(u, v)$ (Conjugate Asymmetry)

Spatial Shift Theorem

$$\mathcal{F}\{f(t - t_0)\}(s) = e^{-j2\pi s t_0} F(s)$$

Spatial transform only affects FT phase

2D Convolution

$$g(m, n) = \sum_{k=-\infty}^{\infty} \sum_{l=-\infty}^{\infty} f(k, l) h(m-k, n-l)$$

Convolution Theorem

$$\mathcal{F}\{f * g\} = \mathcal{F}\{f\} \cdot \mathcal{F}\{g\}$$

$$\mathcal{F}\{f \cdot g\} = \mathcal{F}\{f\} * \mathcal{F}\{g\}$$

$$f * g = \mathcal{F}^{-1}\{\mathcal{F}\{f\} \cdot \mathcal{F}\{g\}\}$$

$$f \cdot g = \mathcal{F}^{-1}\{\mathcal{F}\{f\} * \mathcal{F}\{g\}\}$$

Space convolution = frequency multiplication

Center DC

To shift $F(0, 0)$ (DC Component) to center, multiply by $(-1)^{x+y}$

Frequency Shift Theorem

$$\mathcal{F}\{e^{-j2\pi f_0 t}\} = \delta(f - f_0)$$

Power Spectrum

$$P(u, v) = |F(u, v)|^2$$

Total power of image is just sum of $P(u, v)$ over $P-1, Q-1$

$$a = 100[\text{double sum } P(u, v) / P_t]$$

Convolution Definition

$$(f * g)[n] \stackrel{\text{def}}{=} \sum_{m=-\infty}^{\infty} f[m] g[n-m]$$

$$= \sum_{m=-\infty}^{\infty} f[n-m] g[m]$$

Unsharp, Highboost, High-Emphasis

$$g(x, y) = \frac{1}{k} \{1 + k H_{HP}(u, v)\} F(u, v)$$

$gmask(x, y) = f(x, y) - \text{flp}(x, y)$
 $g(x, y) = f(x, y) + k * gmask(x, y)$
 $k=1$, unsharp
 $k>1$, highboost

Impulse Train Definition

$$\psi_T(t) \stackrel{\text{def}}{=} \sum_{n=-\infty}^{\infty} \delta(t - nT)$$

2D DFT Definition

$$F[k,l] = \frac{1}{MN} \sum_{m=0}^{M-1} \sum_{n=0}^{N-1} f[m,n] e^{-j2\pi \left(\frac{k}{M} m + \frac{l}{N} n \right)}$$

2D Continuous Fourier Transform

$$F(u,v) = \iint_{-\infty}^{\infty} f(x,y) e^{-j2\pi(ux+vy)} dx dy$$

Fourier Series Definition

$$F_k(x) = a_k + \sum_{k=1}^{\infty} (a_k \cos(kx) + b_k \sin(kx)).$$

Laplacian in Freq. Domain

$$\begin{aligned} H(u,v) &= -4\pi^2(u^2 + v^2) \\ H(u,v) &= -4\pi^2 \left[\left(u - \frac{P}{2}\right)^2 + \left(v - \frac{Q}{2}\right)^2 \right] \\ H(u,v) &= -4\pi^2 D^2 + (u,v) \\ &\rightarrow \nabla^2 f(x,y) = \mathcal{F}^{-1} \{ H(u,v) \mathcal{F} \{ f(x,y) \} \} \end{aligned}$$

Displacement: $g(x,y) = f(x,y) + \alpha \nabla^2 f(x,y)$, $\alpha = -1$

$$\begin{aligned} g(x,y) &= \mathcal{F}^{-1} \{ \mathcal{F} \{ f(x,y) \} H(u,v) \} \\ g(x,y) &= \mathcal{F}^{-1} \{ [1 - H(u,v)] \mathcal{F} \{ f(x,y) \} \} \\ g(x,y) &= \mathcal{F}^{-1} \{ [1 + 4\pi^2 D^2] \mathcal{F} \{ f(x,y) \} \} \end{aligned}$$

DC Component

$$F(0,0) = \sum_{m=0}^{M-1} \sum_{n=0}^{N-1} f(m,n) = MN \bar{f}(x,y)$$

2D Sampling

$$\sum_{n=-\infty}^{\infty} \sum_{m=-\infty}^{\infty} \delta(x - nX) \delta(y - mY)$$

Gaussian Filter

$$\begin{aligned} \text{Low-Pass: } H(u) &= A e^{-\frac{u^2}{2\sigma^2}} \\ H(x) &= \sqrt{2\pi} \sigma A e^{-\frac{x^2}{2\sigma^2}} \\ \text{High-Pass (wide narrow band): } H(u) &= A e^{-\frac{u^2}{2\sigma^2}} - B e^{-\frac{u^2}{2\sigma^2}} \\ H(x) &= \sqrt{2\pi} \sigma A e^{-\frac{x^2}{2\sigma^2}} - \sqrt{2\pi} \sigma B e^{-\frac{x^2}{2\sigma^2}} \end{aligned}$$

C

By **Sawyer McLane**
(samclane)

cheatography.com/samclane/
[samclane.github.io](https://github.com/samclane)

Published 18th November, 2016.
Last updated 18th November, 2016.
Page 1 of 2.

Sponsored by **Readable.com**
Measure your website readability!
<https://readable.com>